


International ProStar-LoneStar PeopleNet Connected Gateway™ Install

Install Steps



- 1) Connect and mount the display.
- 2) Connect and mount the PCG.
- 3) Connect the display blue barrel and 2-pin power to the PCG Main Cable. Non-Trimble displays will not require the blue barrel.
- 4) Connect the PCG Main Cable to the vehicle (On-Dash Install) or Y-Cable (In-Dash Install).
- 5) Connect the Y-Cable to the vehicle (In-Dash Install).

Install Overview

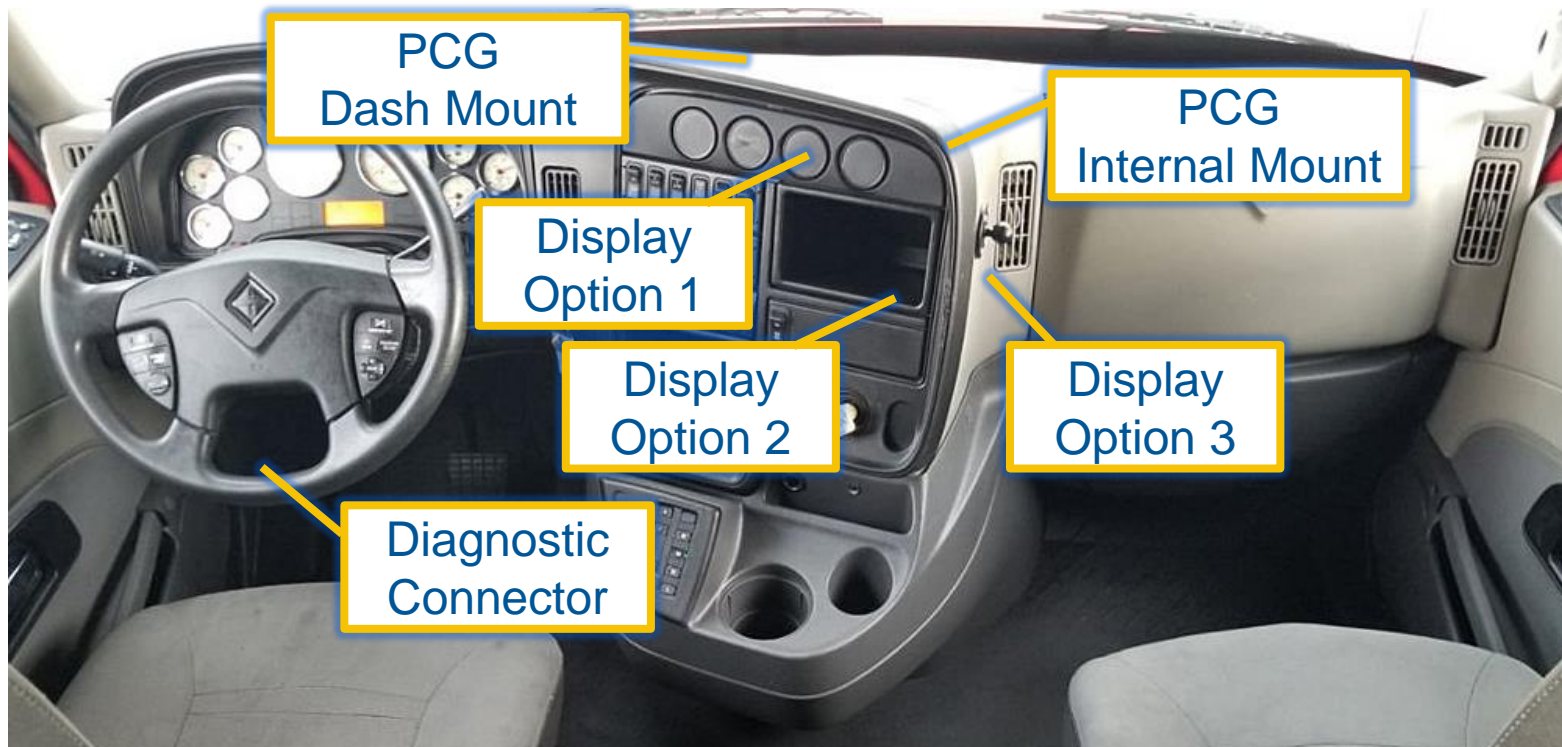

On-Dash Installation Steps

- 1) Connect the PCG Main Cable to the vehicle diagnostic port.
- 2) Route the PCG cable up the side of the dash, making sure it is clear of the door and will not interfere with safe vehicle operation.
- 3) Clean a spot on top of the dash using an alcohol swab and a paper towel, then attach the PCG using the tape provided.
- 4) Mount the display-See below for options and steps.
- 5) Route the display cable to the connectors on the PCG cable, then connect both the 2-pin power and blue barrel connections.
- 6) Bundle the cables so they cannot interfere with the safe operation of the vehicle.
- 7) Turn the vehicle key ON to boot the system, then follow the PCG Activation steps.

In-Dash Installation Steps

- 1) Connect the PCG Main Cable to the Y cable and connect the Y cable to vehicle, leaving the Y-cable male as the new vehicle diagnostic.
- 2) Route the PCG cable through the dash to the mount location shown below.
- 3) Clean the PCG mounting space using an alcohol swab and a paper towel, then attach the PCG using the tape provided, making sure the logo is facing the sky.
- 4) Mount the display-See below for options and steps.
- 5) Route the display cable to the connectors on the PCG cable, then connect both the 2-pin power and blue barrel connections.
- 6) Bundle the cables so they cannot interfere with the safe operation of the vehicle.
- 7) Turn the vehicle key ON to boot the system, then follow the PCG Activation steps.

Display Mount Option 1

International Eyebrow Bracket
Trimble Part H-050-0505



The eyebrow bracket replaces
the top center dash panel.




The RAM swivel mounts to the
pre-drilled holes, with a pass-
through for the display cable.


Display Mount Option 2

NOTE THAT THIS MOUNT IS AVAILABLE ONLY THROUGH VELOCITI.

International Central Bracket
Velociti Part V99949

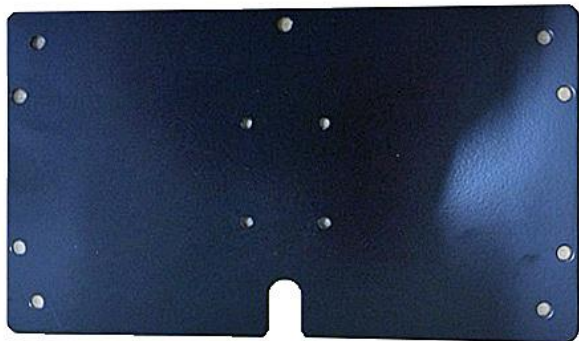

The bracket replaces the
central storage space.

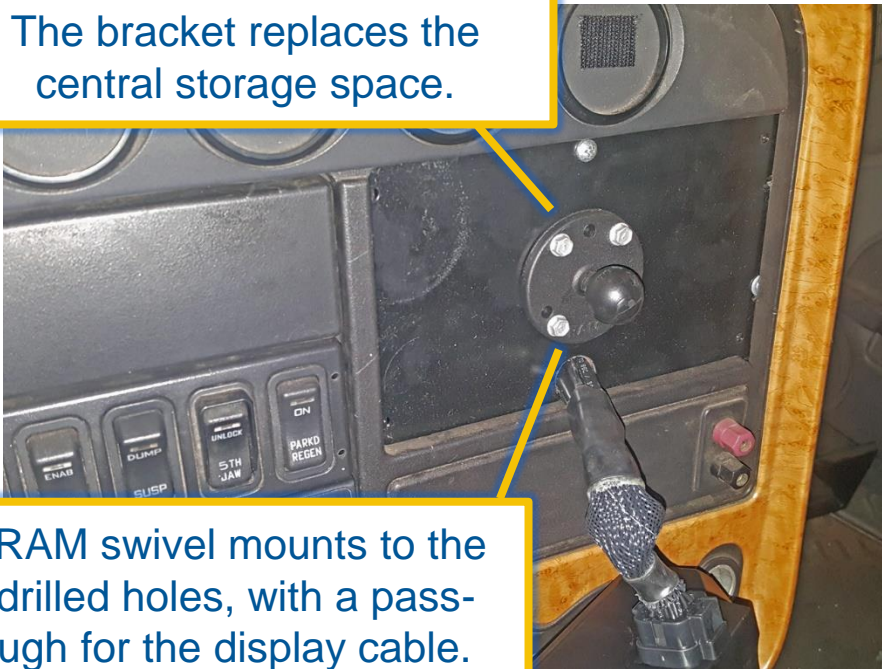

The RAM swivel mounts to the
pre-drilled holes, with a pass-
through for the display cable.

Display Mount Option 3



Mount the RAM swivel to the passenger's side of the dash using bolts and a backing plate or large washers.

Route the cable into the dash below the fuse panel cover if desired.


Diagnostic Connection On-Dash

Tuck the cable between the dash and cab side.

Connect the PCG Main Cable to the diagnostic connector. It will work with both black and green diagnostic plugs.




On-Dash PCG Mount



Clean the top of the dash between the defrost vents using alcohol and a clean paper towel.

Mount the PCG using the tape provided and secure the cabling.

Diagnostic Connection – In-Dash

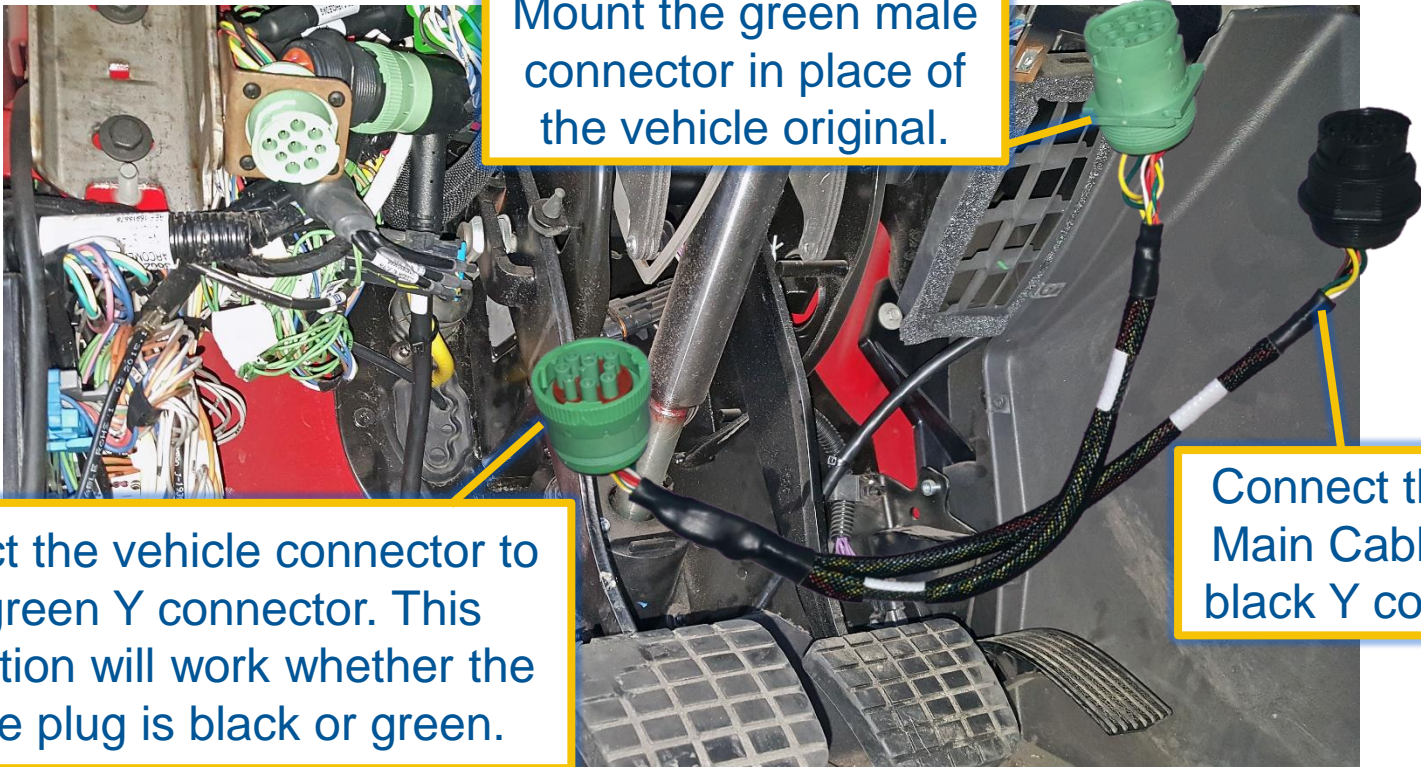


Mount the green male connector in place of the vehicle original.

Connect the vehicle connector to the green Y connector. This connection will work whether the vehicle plug is black or green.

Connect the PCG Main Cable to the black Y connector.

In-Dash PCG Mount

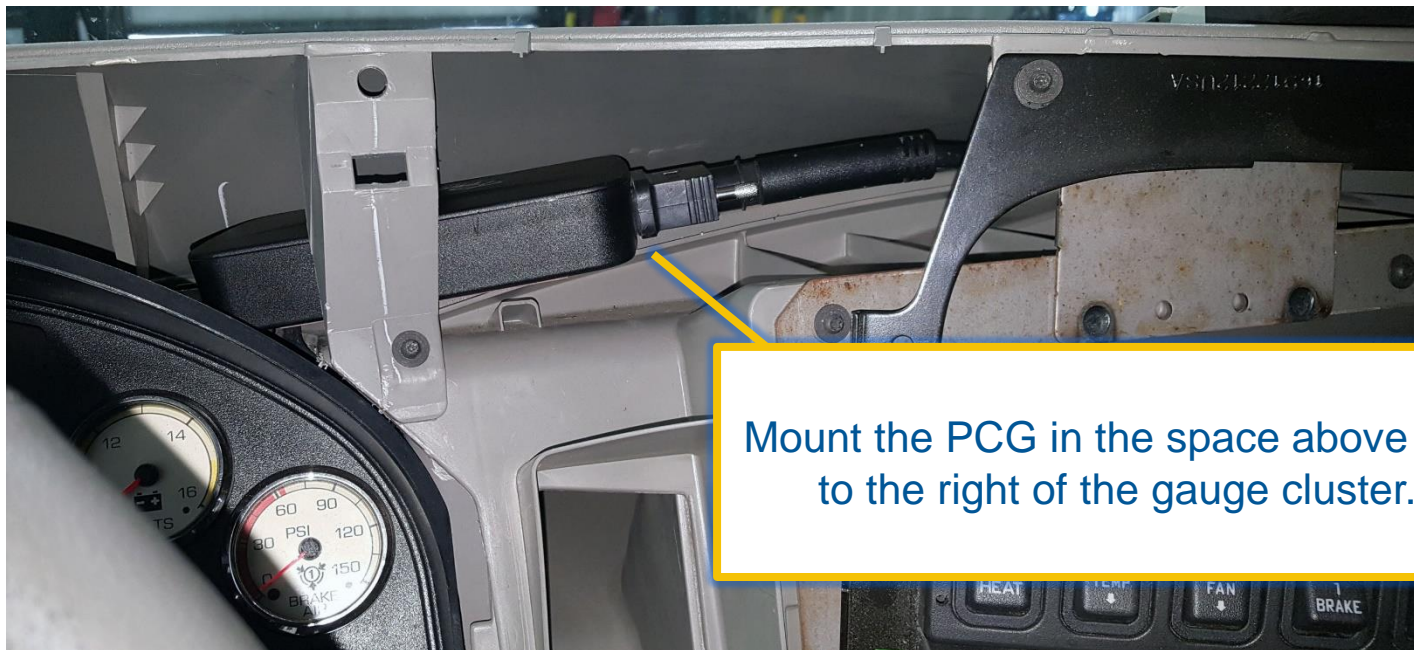

Mount the PCG in the space above and to the right of the gauge cluster.